

# Dimmable LED BULB B6005-DIM



## Applications

- *Area: Indoor use only, with dimmer.*
- *Easy use and easy installation*

## Features

- *NICHIA's 083BT series LEDs with high lumens and long lifetime.*
- *ELV dimmer(wall dimmer) available.*
- *10%-100% dimmable.*
- *Perfect optical feast of eyes*
- *Unique design for good heat elimination performance.*



## Specification:


| Art. No            | LED    |        |     | Voltage (VAC) | Power (W) | PFC  | Base | Dimension (mm) | Working temperature | Lifetime (hrs) |
|--------------------|--------|--------|-----|---------------|-----------|------|------|----------------|---------------------|----------------|
|                    | Origin | Lm/LED | mA  |               |           |      |      |                |                     |                |
| B6005-DIM-E27(NW)  | 083BT  | 90-110 | 300 | 220           | 6 (5X1W)  | 0.85 | E27  | φ 60x107       | -5°C~+35°C          | 45000          |
| B6005-DIM-E27(WW)  | 083BT  | 80-100 | 300 | 220           | 6 (5X1W)  | 0.85 | E27  | φ 60x107       | -5°C~+35°C          | 45000          |
| B6005-DIM-GU10(NW) | 083BT  | 90-110 | 300 | 220           | 6 (5X1W)  | 0.85 | GU10 | φ 60x107       | -5°C~+35°C          | 45000          |
| B6005-DIM-GU10(WW) | 083BT  | 80-100 | 300 | 220           | 6 (5X1W)  | 0.85 | GU10 | φ 60x107       | -5°C~+35°C          | 45000          |
| B6005-DIM-B22(NW)  | 083BT  | 90-110 | 300 | 220           | 6 (5X1W)  | 0.85 | B22  | φ 60x107       | -5°C~+35°C          | 45000          |
| B6005-DIM-B22(WW)  | 083BT  | 80-100 | 300 | 220           | 6 (5X1W)  | 0.85 | B22  | φ 60x107       | -5°C~+35°C          | 45000          |

## Packaging Information



|                       |                  |         |
|-----------------------|------------------|---------|
| Packing: 33 PCS / CTN |                  |         |
| Box                   | 8.5X6.0X10.4(cm) | 0.19 kg |
| Carton                | 57.5x26.5x36(cm) | 7.83 kg |

## Optical Performance

| Color         | Luminous Flux (lm) | Color Temperature(K)  | CRI |
|---------------|--------------------|-----------------------|-----|
| Natural White | 357                | 5000±200K             | 75  |
| Warm White    | 300                | 2800±200K / 3200±200K | 80  |

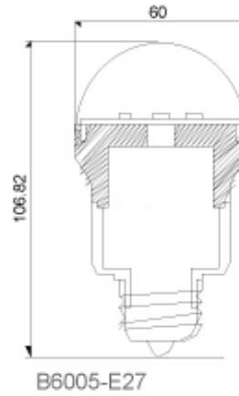

### Natural White

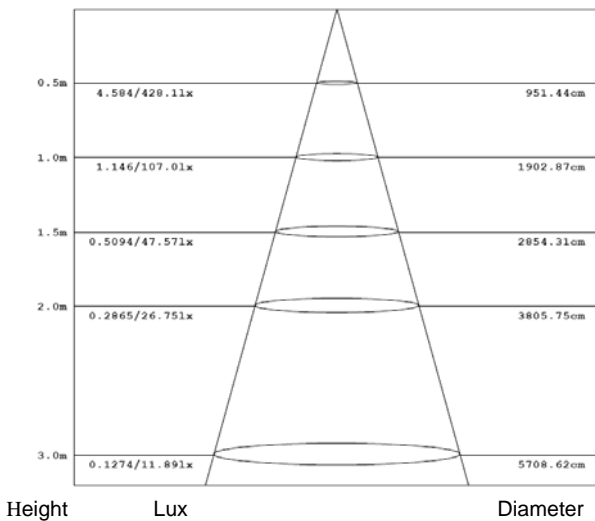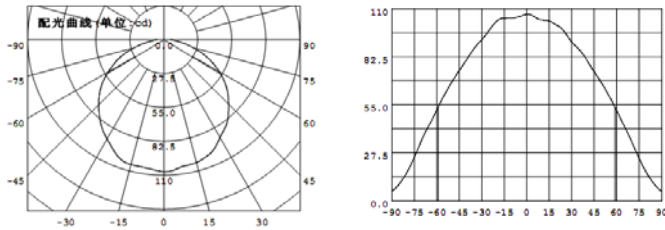

### Warm White

