

LED BULB P2010



LED BULB P2010

Applications

- **Area: Indoor use only. No dimmer**
- **Easy use and easy installation**

Features

- **NICHIA 083B LED**
- **Perfect optical feast of eyes**
- **Unique design for good heat elimination performance.**
- **Longlife time**



Specification:


Art. No	LED			Voltage (VAC)	Power (W)	PFC	Base	Dimension (mm)	Working temperature	Lifetime (hrs)
	Origin	Lm/LED	mA							
P2010-E27(NW)	083BT	90-110	300	220 / 110	10 (9X1W)	0.85	E27	φ 60x108	-5°C ~ +35°C	45000
P2010-E27(WW)	083BT	80-100	300	220 / 110	10 (9X1W)	0.85	E27	φ 60x108	-5°C ~ +35°C	45000
P2010-GU10(NW)	083BT	90-110	300	220 / 110	10 (9X1W)	0.85	GU10	φ 60x108	-5°C ~ +35°C	45000
P2010-GU10(WW)	083BT	80-100	300	220 / 110	10 (9X1W)	0.85	GU10	φ 60x108	-5°C ~ +35°C	45000
P2010-B22(NW)	083BT	90-110	300	220 / 110	10 (9X1W)	0.85	B22	φ 60x108	-5°C ~ +35°C	45000
P2010-B22(WW)	083BT	80-100	300	220 / 110	10 (9X1W)	0.85	B22	φ 60x108	-5°C ~ +35°C	45000

Packaging Information


Packing: 36PCS / carton		
Box	8.5X6.0X10.4(cm)	0.19 kg
Carton	57.5x26.5x36(cm)	8.3 kg

Optical Performance:

Color	Lumens (lm)	Color Temperature(K)	CRI	Beam angle
Natural White	585	5000	75	60°
Warm White	488	2800 / 3000	80	60°

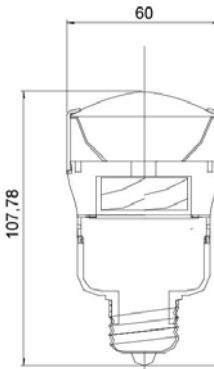

Natural White

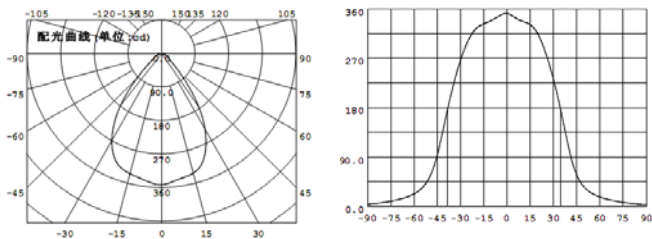

Warm White

